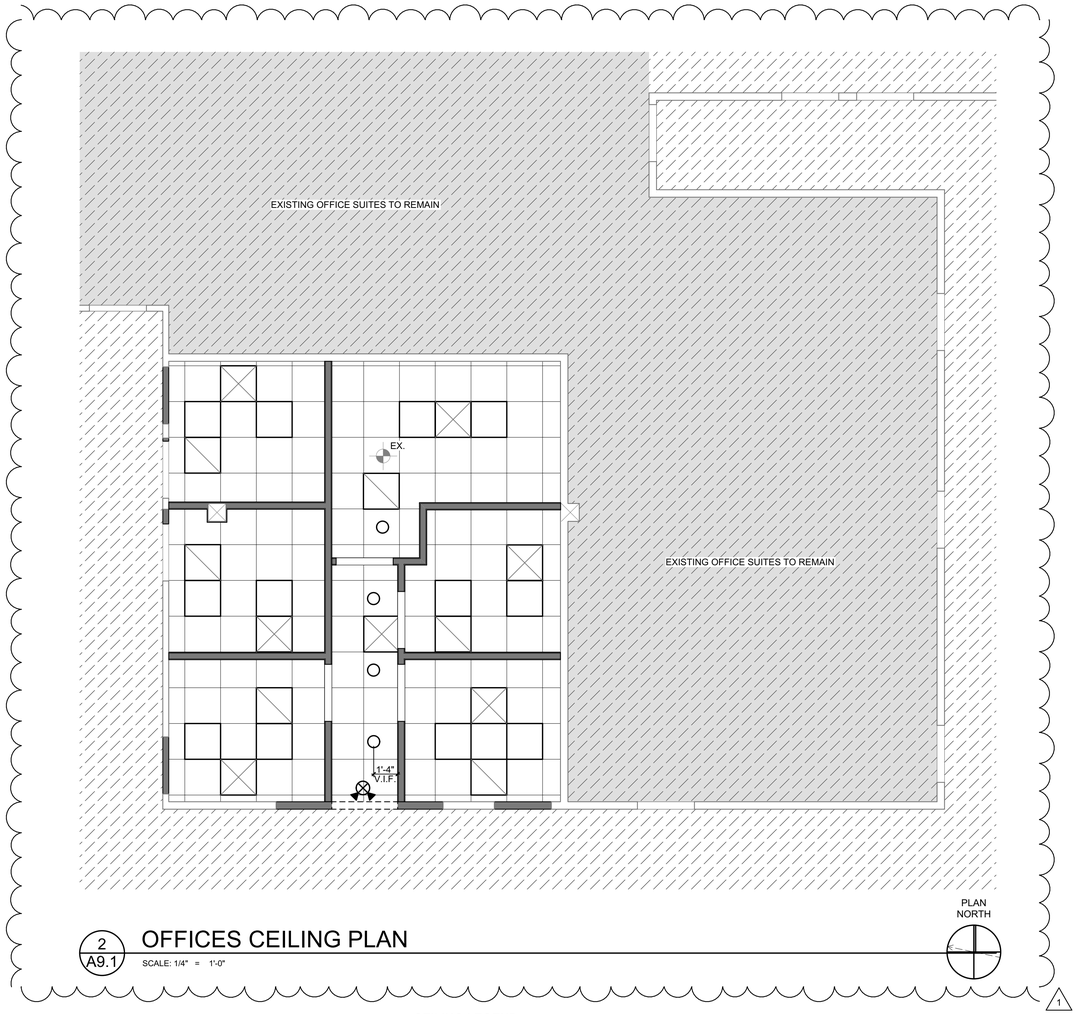

2 A9.1 OFFICES CEILING PLAN

SCALE: 1/4" = 1'-0"

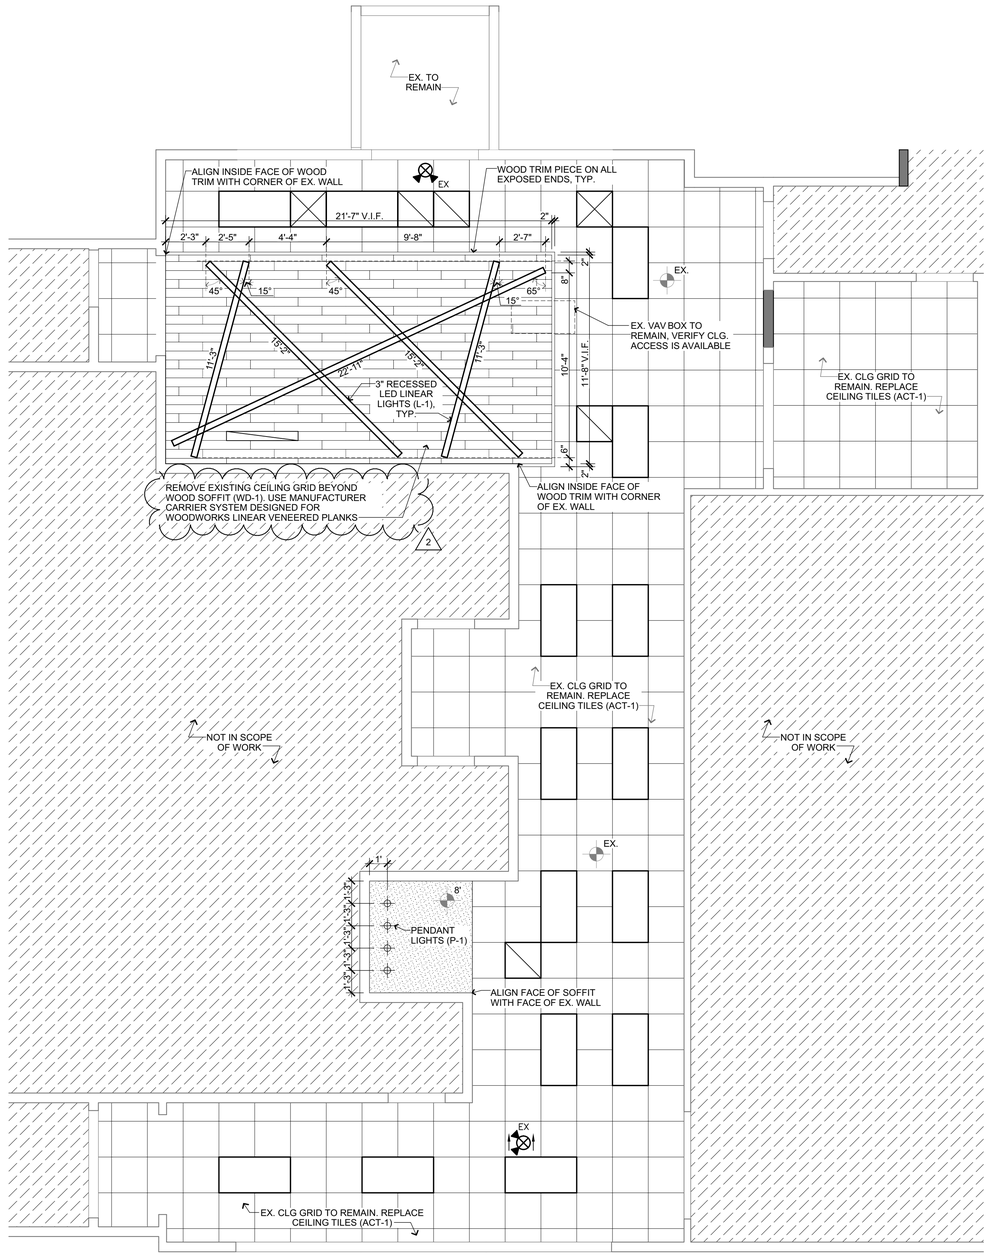

1 A9.1 LOBBY CEILING PLAN

SCALE: 1/4" = 1'-0"

CEILING LEGEND:

NOTES:
1) ALL CEILING HEIGHTS EXISTING TO REMAIN. UNLESS NOTED OTHERWISE ON CEILING PLAN.
2) ALL SOFFITS TO BE 8' AFF U.N.O.
3) SUSPENDED ACOUSTICAL TILE SYSTEM AND INSTALLATION SHALL COMPLY WITH SEISMIC DESIGN CATEGORY 'D', ASTM C 635, ASTM 636.

- EX. CLG GRID TO REMAIN. REPLACE ACT CLG. TILE (ACT-1)
- PAINTED GYP. BOARD
- WOOD PLANK CEILING (WD-1), SEE ID1.2 FOR DETAILS
- EX. SUPPLY, SEE MECH.
- EX. RETURN OR EXHAUST, SEE MECH.
- NEW SUPPLY, SEE MECH.
- NEW RETURN OR EXHAUST, SEE MECH.
- NEW SLOT DIFFUSER, SEE MECH.
- EX EX. EXIT LIGHT - SEE ELEC.
- NEW 2X2 LED LAY-INS, SEE ELEC.
- NEW 2X4 LED LAY-INS IN EX. LOCATIONS, SEE ELEC.
- P-1 LED PENDANT LIGHT - COORDINATE MOUNTING HT. W/ DESIGNER PRIOR TO INSTALL
- L-1, LED LINEAR RECESSED LIGHT - COORDINATE INSTALLATION W/ DESIGNER

NOTE:
1. REPLACE ALL 2X4 LED LIGHTS IN AREA OF WORK, OWNER PROVIDED LIGHTS, CONTRACTOR INSTALLED. COORDINATE W/ OWNER
2. P-1 LED PENDANT LIGHT TO BE TECH LIGHTING MINA LED 3000K MINI PENDANT IN BLACK FINISH W/ BLACK CORD. ORDER COORDINATING TECH LIGHTING LOCUS ACCESSORY IN BLACK FINISH
3. L-1 LED LINEAR RECESSED LIGHT TO BE PRUDENTIAL LIGHTING BIONICPRO3 3" SLOT RECESSED LED 3500K IN CUSTOM COLOR W/ CUSTOM CORNERS. REFER TO 1/A9.1 FOR LAYOUT & DETAILS

GEORGE ARMOUR EWART ARCHITECT
404 Bearden Park Circle
Knoxville, TN 37919
865.602.7771
Fax 865.602.7742
www.georgeewart.com

INTERIOR RENOVATION FOR:
KNOXVILLE EXECUTIVE SUITES
9111 CROSS PARK DRIVE D200
KNOXVILLE, TN

GEORGE A. EWART REGISTERED ARCHITECT AGC STRUCTURES STATE OF TENNESSEE 30 2316
11 NOV 2021

CEILING PLAN

KEY PLAN



DATE: 11 NOV 2021
PROJECT NO.: 21101
2 PROJECT MGR.: WCW
REVISION #2 26 JAN 2022

A9.1